


RTS-ALCR-D520

Remote Test Switch

Installation Guide

The RTS-ALCR-D520 is a momentary push switch to be used to remotely test the ALCR-D5, ALCR-D10 & ALCR-D20 Automatic Load Control Relays. Install into a standard 2" x 4" junction box. The two wire terminations connect directly to the ALCR-D5, ALCR-D10 and ALCR-D20 Class 2, dry contact "Remote Test Input."

Note: The RTS-ALCR-D520 is only to be used with models ALCR-D5, ALCR-D10 & ALCR-D20 Emergency Lighting Automatic Load Control Relays.

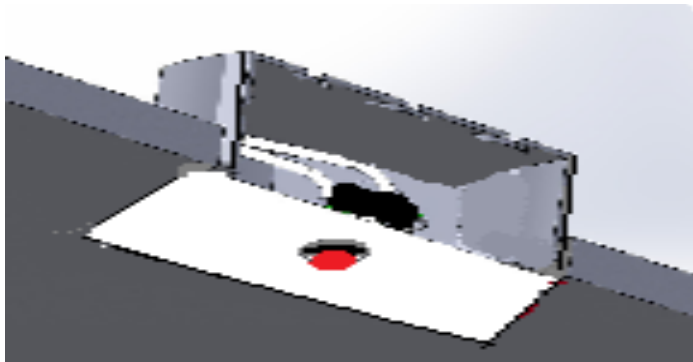

Acceptable Wiring: 18-24 AWG, Solid or Stranded with at least ¼" stripped

Wiring Terminations:

Junction Box: 2" x 4" rectangular J-Box with #8 cover plate screws.

Actuator: Red momentary pushbutton

Color: White Plate

Overriding a 0-10Vdc Dimmer

