



## Assurance Emergency Lighting **REB950**

### The “Rebel”

Recessed Emergency Light




Two Lens are provided for EM unit spacing of either up to 80’ path of egress or open office space ( 30’ x 30’) and meet life safety code compliance.



## Why use the Assurance EM REB950?


- Simple solution—2 wire connection.
- Clean Look—Ceiling mounting
- High Light Output- 950 lumens
- Covers a large area—30’x30’ open space or up to 80 ‘ hallway– corridor spacing
- 2 changeable lens for path or open room space
- Low Cost—Easy Installation
- Self Diagnostic ( monthly and Annual Testing)
- UL Listed - 90 minutes run Time
- CEC Title 20

The Assurance Emergency Lighting High Light Output ceiling mount REB950 self diagnostic emergency lighting unit is an excellent choice for long corridors or open spaces. The round white faced REB950 provide 950 lumens of illumination for 90 minutes in the event of a power failure. The high power output allows for up to 80’ spacing for corridor lighting or 30’ by 30’ spacing for open rooms to meet emergency lighting code requirements. The REB950 comes with an installed standard corridor lens and a field installable wide space lens for open spaces. Self Diagnostics is standard.

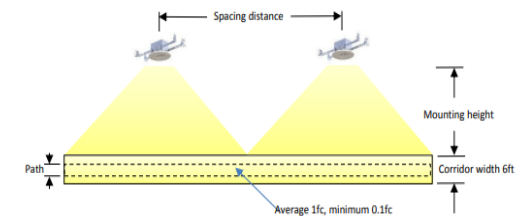

Mounting height	Spacing distance @6ft width corridor/6ft path	Spacing distance @6ft width corridor/3ft path
9ft	72ft	75ft
10ft	78ft	80ft
12ft	76ft	78ft

### Wide lens for open area

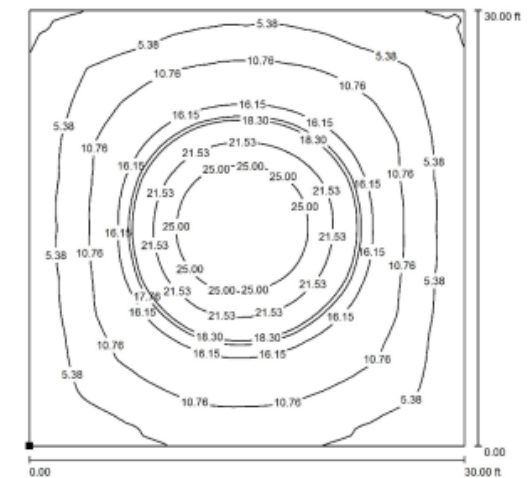

Other Products from Assurance Emergency

- LED Emergency Drivers ( 4W to 30W)
- Emergency Lighting Inverters from 27W to 1150W
- UL924 Relays
- Fluorescent Emergency Ballast

Tech Support: 877-774-4775  
AssuranceLighting.com

